


## DESCRIPTION

The VP-2064 Power Amplifier features a 60 W-by-4 channels configuration, and uses the VP-200VX Power Amplifier Module per channel.


## SPECIFICATIONS

Power Source	28 V DC (operating range: 20 – 40 V DC) M4 screw terminal, distance between barriers: 12 mm
Current Consumption (EN60065)	4.8 A in total
Rated Output Power	60 W × 4
Output Voltage/Impedance	100 V/167 Ω, 70 V/83 Ω, 50 V/41 Ω (selectable by the internal wiring change)
Number of Channels	4
Input	Specified by input module VP-200VX
Number of Module Slots	4, usable module: VP-200VX
Output	Power amplifier output (speaker line): M3.5 screw terminal, distance between barriers: 8.8 mm
Frequency Response	40 – 16,000 Hz, ±3 dB (at 1/3 rated output)
Distortion	Under 1% (at rated output, 1 kHz)
S/N Ratio	Over 80 dB
Panel Indicator	Channel power indicator: 4 channels, dual colour LED Overheat indicator: Yellow LED
Operating Temperature	0°C to +40°C
Finish	Panel: Surface-treated steel plate, black, 30% gloss, paint
Dimensions	482 (W) × 88.4 (H) × 340.5 (D) mm
Weight	11.2 kg
Accessory	Rack mounting screw .....4, Fiber washer .....4


## APPEARANCE

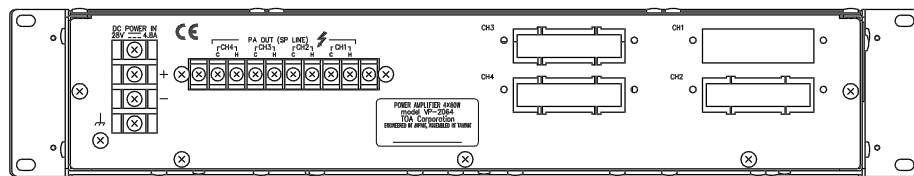

Rear View

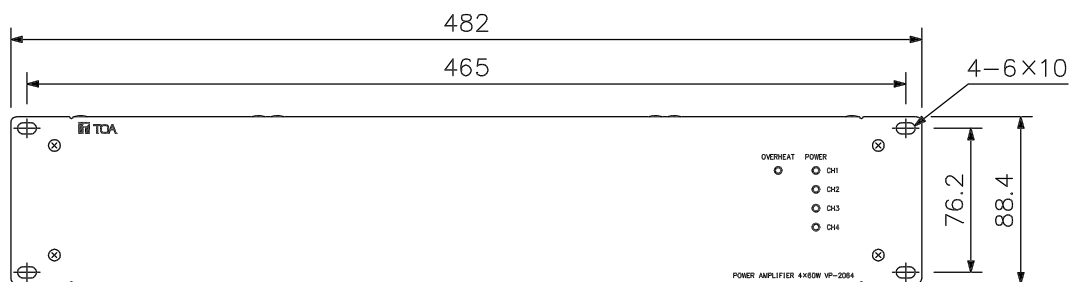

Front View

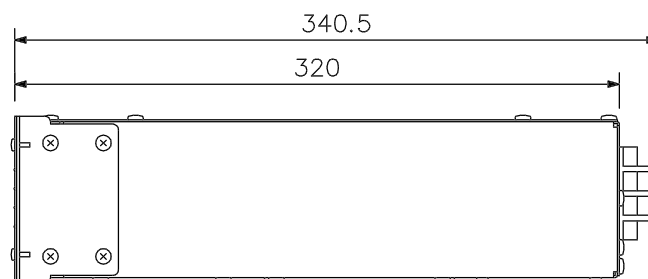

Side View

UNIT:mm SCALE:1/4